



Smart™ Sensor RS422 Wiring Guide

2X stainless steel inserts with 10-32 threads

Ø 2.30" 58.4mm

Transducer

0.75" 19.05mm

1.0" 25.4mm

15.50" 393.7mm

6.0" 152.4mm

Bulkhead Connector

1 Transducer + (#1)

2 Transducer - (#2)


3 Opt. Cable Shield (#3)

Input Voltage (9 - 40VDC) Ground

1/1-28 UNF-2A Torque not to exceed 15 in lbs

O-Ring

Bulkhead Connector

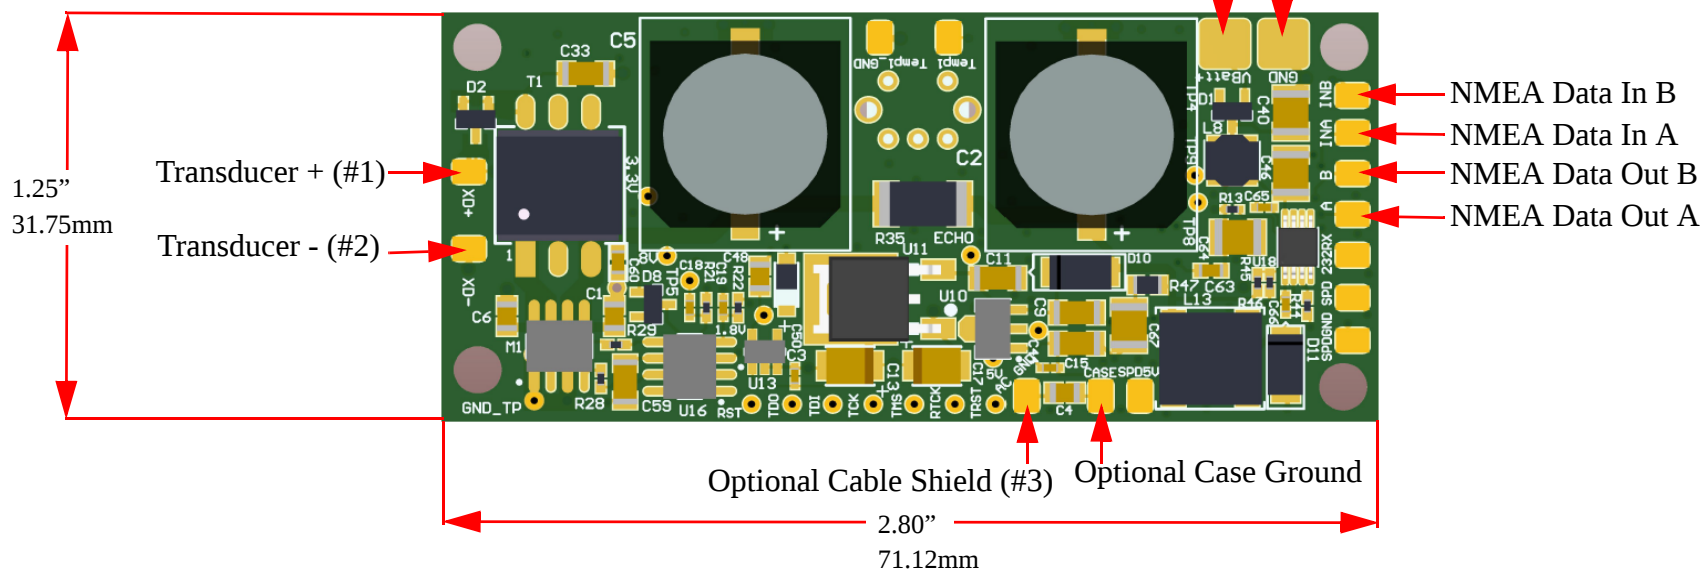

AIRMAR TECHNOLOGY CORPORATION
35 MEADOWBROOK DR.
MILFORD, NH 03055-4613 USA
TEL: 603-673-9570 FAX: 603-673-4624

Part Rev:	1
Doc Rev:	1

[CD] CRITICAL DIMENSION
DO NOT SCALE DRAWING